

GE  
Lumination

Call 925-455-5267

# RX11 LED Signal Modules

8 and 12 inch

## Features, Benefits and Values





- High efficiency & long life LED light source
- Designed to conform to applicable ITE specifications
- Failure of single LED results in loss of light from only that LED
- UV stabilized shell
- Moisture and dust resistant
- Direct retrofit design
- Incandescent look
- Sun phantom protection
- All products shipped with installed gasket
- EPACT 2005 compliant



# RX11 LED Signal Modules

- 8 and 12 inch

## Mechanical Outline Dimensions in inches. (mm) indicates metric equivalent

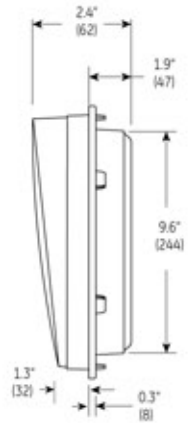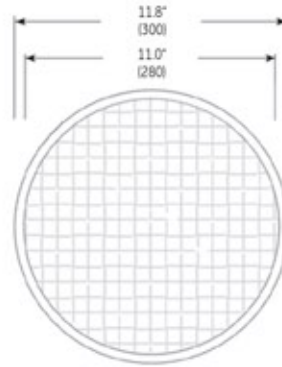

## Design Compliance

Test Type	Compliance
Luminous Intensity	ITE VTCSH-STD Part 2 - July 1998
Chromaticity	ITE VTCSH-STD Part 2 - July 1998
Moisture Resistance	NEMA STD 250 Type 4 - 1991
Mechanical Vibration	MIL-STD-883 Method 2007
Electronic Noise	FCC Title 47 Sub. B Sec 15 <sup>1</sup>
Transient Voltage Protection	ITE VTCSH-STD Part 2 - July 1998
Controller Compatibility	NEMA TS-2-1992
Wiring	National Electric Code

<sup>1</sup> Class A

## Operating Specifications

Parameter	Rating
Operating Temperature Range	-40 to + 74°C (-40 to +165°F)
Operating Voltage Range	80 to 135 V (60Hz AC)
Power Factor (PF)	> 90 %
Total Harmonic Distortion (THD)	< 20 %
Voltage Turn-off (VTO)	45 V
Lens & Shell Material	UV Stabilized Polycarbonate
Wiring	16 AWG, Color Coded with Strain Relief

## Product Information

Model Number	Size (in)	AC Voltage	Power (W)	Wavelength (nm)	Maintained Intensity (Cd)
		Nominal	Nominal	Dominant	Minimum
DR4-RTFB-20A	8	120V - 60 Hz	5	626	133
DR4-YTFB-20A	8	120V - 60 Hz	13	589	267 <sup>2</sup>
DR4-GTFB-20A	8	120V - 60 Hz	6	508	267
DR4-GCFB-20A	8	120V - 60 Hz	6	508	267
DR6-RTFB-20A	12	120V - 60 Hz	10	626	339
DR6-YTFB-20A	12	120V - 60 Hz	22	589	678 <sup>3</sup>
DR6-GTFB-20A	12	120V - 60 Hz	12	508	678
DR6-GCFB-20A	12	120V - 60 Hz	12	508	678

Options:  
 - Q : Quick Connect  
 - S : Medium Base Socket  
 - F : In-line Fuse

Standard product equipped with spade connectors.

<sup>2</sup> Measured at +2.5°H -2.5°V, T<sub>a</sub> = 25°C.

<sup>3</sup> Actual intensity less than ITE specification.

Distributed by:



For more Information Call 925-455-5267  
[customerservice@jamservicesinc.com](mailto:customerservice@jamservicesinc.com)

Lumination, LLC is a subsidiary of GE Consumer & Industrial. The GE brand and logo are trademarks of the General Electric Company.

© 2007 Lumination, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

TRAF015-R100207